



DC CONTROLLER

MU1000C

Battery voltages: 24 up to 220V_{DC}

KEY FEATURES

- **Wide measuring and supply voltage range**
- **Easy programming via RS232-interface with PC**
- **Wide range of monitoring and signalling functions**
- **Temperature compensation of the charge voltage for PSS-rectifiers**
- **Alphanumeric LCD display for measuring values and system parameters**
- **CAN-Bus interface**

PRODUCT DESCRIPTION

The DC controller MU1000C is a built-in module for front panel mounting for control, monitoring and signalling of DC-power supply systems with battery backup. The units are easy to use and they are programmable via keys at the front panel or via RS232 interface and PC.

The control of all connected PSS-rectifiers, DC-DC converter and inverter modules is realized via a CAN communication bus.

The measuring values and operation states of the devices are shown on the alphanumeric display.

The designations of all inputs are individually programmable. Different relay outputs are available for remote signalling of single or general faults. Single faults and their linkages can be assigned user defined to the relay outputs.

In addition to internal text messages several front side LED's indicate the state of main system parameters (2 LED's are free programmable).

The functionality of the basic module can be upgraded with optional extension boards.

APPLICATIONS

DC power supply systems with battery backup in all areas of industry, power generation and power distribution.




TECHNICAL DATA

Type	MU1000C-I Language	MU1000C-II Language
Article code	300-110-660.00	300-110-770.00
Supply voltage range	18-80VDC	80-300VDC
Voltage measuring range	0-100VDC	0- 300VDC
Input power consumption	appr. 3W	
Voltage measuring inputs	3, accuracy 1%; 3 x mains voltage and frequency (with optional mains monitoring board only)	
Current measuring inputs	3 (1 x ± 60mV for battery charge / discharge current measurement; (2 x + 60mV) 3 x mains current (option: Battery monitoring board)	
Temperature measuring input	1 (for optional temperature sensor)	
PE-connector	1 (isolation fault)	
Digital measuring inputs	8 (free programmable)	
Alphanumeric display	LCD, 2x16 characters, with backlight	
LED indications	Operating, V>V _{min} , V>V _{max} , isolation fault, S1/S2 (free programmable LED indications), alarm A (general fault, urgent alarm), alarm B (free programmable linkage of single faults, non urgent alarm)	
Relay outputs	4 relay contacts, error messages free programmable, extension to 10 free programmable relays (with optional relay board)	
Configuration/interfaces	RS232 interface, CAN interface	
Communication	CAN-bus interface for communication with PSS/PSR-rectifier modules, UNV-inverter modules and UNB modules; RS232 interface for external modem control (optional) and programming of all functions and parameters via PC	
Functions	Boost charge control (current-, voltage- and time dependent); battery test (voltage- and time dependent); controlling of voltage drop-down diodes; battery low protection; battery midpoint voltage monitoring; isolation fault monitoring	
Microprocessor controlling	Programmable monitoring functions with history function, real time clock, device parameters via front keys and alphanumeric display	
Languages	German, English, Swedish, Italian, Russian, Czech, French	
Ambient temperature	Operation: -20°C to +55°C, storage: -40°C to +85°C	
Climatic conditions	IEC 721-3-3 class 3K3/3Z1/3B1/3C2/3S2/3M2	
Max. installation altitude	≤ 1500m	
Audible noise	≤ 30dB (A) in 1m distance	
Construction	Built-in module for front panel mounting, rear side connectors	
Dimensions (W/H/D)	142/129/70mm	
Weight	approx. 0,6kg	
Type of enclosure / Protection class	IP20 (mech.); 1 acc. to EN 60950 (electr.)	
Colour (front panel)	RAL 7035	
CE conformity	yes	
Compliance to safety standards	EN 60950-1; VDE 0100 part 410; VDE 0110, EN 50178, EN 60146	
Compliance to EMC standards	EN 55022 class „B“, EN 61000-4 part 2-5	

OPTIONS

Article code	Designation
300-110-000.CZ	Czech language for the alphanumeric display/further languages on request
300-110-000.F	French language for the alphanumeric display/further languages on request
300-110-000.RUS	Russian language for the alphanumeric display/further languages on request
302-110-CON.00	MU1000C configuration software, Win based PC software (once/customer)
302-DCC-0MM.00	Mains monitoring board 1/3 phase; DIN rail module; connection via CAN interface
302-DCC-0BM.00	Battery monitoring board (up to 3 additional battery strings; U,U/2,I,T); DIN rail module
302-DCC-DI8.00	Signalling board with 8 digital alarm inputs; DIN rail module; connected via CAN interface
302-DCC-ORB.00	Relay board with 6 isolated signalling outputs; DIN rail module; connected via CAN interface
880-300-TMP.01	Temperature sensor LM335 with 4 m connecting cable and cable shoe

DIMENSIONS

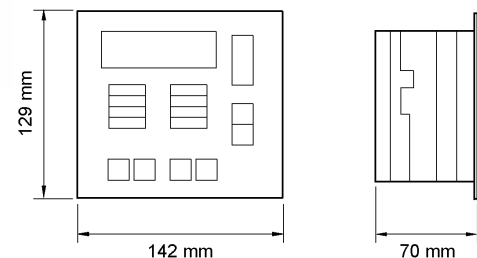

DS_MU1000C_2007_E_R02 - Subject to change without notice - Eltek Valere Industrial GmbH

Eltek Valere Industrial GmbH
Schillerstrasse 16
D-32052 Herford
Tel: +49 52 21 17 08 200
info.industrial@eltekvalere.com
www.eltekvalere.com

Finland
Eltek Energy Oy
Tel: +35 820 779 88 20
France
Eltek - SFEE SA
Tel: +33 562 340 930
Germany
Eltek Valere Industrial GmbH
Tel: +49 52 21 17 08 200
Eltek Valere Deutschl. GmbH
Tel: +49 694 2002 0

Norway
Eltek Valere AS
Tel: +47 32 20 32 00
Poland
Eltek Polska Sp. Z o.o.
Tel: +48 914 852 440
Russia
OOO Eltek St. Petersburg
Tel: +78 123 321 117
United Kingdom
Eltek Energy (UK) Ltd
Tel: +44 144 22 193 55

Spain
Eltek Energia S.A.
Tel: +34 914 920 660
Sweden
Eltek Energy AB
Tel: +46 862 664 20
Alab DC Systems AB
Tel: +46 54 68 81 50
Malaysia
Eltek Energy (M) Sdn Bhd
Tel: +60 179 815 866/74 552

Australia
Eltek Pacific Pty Ltd
Tel: +61 294 794 200
Bangladesh
Eltek Energy Pte Ltd
Tel: +88 017 2097 097
India
Eltek SGS Pvt Ltd
Tel: +91 124 221 00 18
Malaysia
Eltek Energy (M) Sdn Bhd
Tel: +60 179 815 866/74 552

Pakistan
Eltek Energy AS Pakistan
Tel: +92 512 853 149
Philippines
Eltek Energy Incorporated
Tel: +63 291 063 55
Singapore
Eltek Energy Pte Ltd
Tel: +65 773 23 26
Thailand
Eltek Energy Incorp 2005 Ltd
Tel: +66 294 369 05

UAE
Eltek Middle East
Tel: +97 148 871 176
China
Eltek Energy Technology Ltd
Tel: +86 769 226 511 08
Hong Kong
Eltek Energy Ltd
Tel: +85 228 982 689
Brazil
Eltek Sistemas de Energia
Tel: +55 116 487 56 56

Colombia
Eltek Energy LLC
Tel: +57 162 216 91
USA
Eltek Energy LLC
Tel: +18 154 599 100
Mexico
Eltek Energy International
Tel: +52 55 53 74 1842
Peru
Eltek Energy de Peru SRL
Tel: +51 142 192 71